




INA BRAINGS SALES JAPAN CO.,LTD.

10 mm x 22 mm x 6 mm NTN 6900LLU deep groove ball bearings

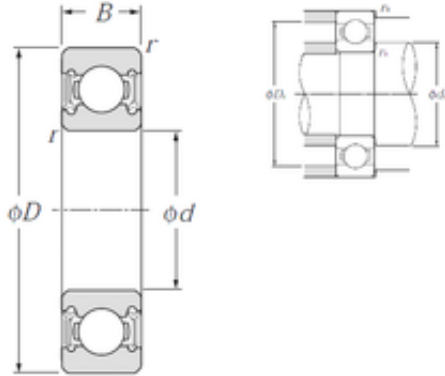

Bearing No. 6900LLU

6900LLU Bearing 2D drawings and 3D CAD models

Size	10x22x6 mm
Bore Diameter	10 mm
Outer Diameter	22 mm
Width	6 mm
d	10 mm
D	22 mm
B	6 mm
C	6 mm
r min.	0,3 mm
da min.	12 mm
da max	13 mm
Da max.	20 mm
ra max.	0,3 mm
Weight	0,009 Kg
Basic dynamic load rating (C)	2,7 kN
Basic static load rating (C0)	1,27 kN
Reference speed	21 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.009
EAN	4547359006490
Product Group	B00308
Enclosure	2 Seals



INA BRAINGS SALES JAPAN CO.,LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	10MM Bore; 22MM Outside Diameter; 6MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6900LLU
Weight / LBS	0.021
Outside Diameter	0.866 Inch 22 Millimeter
Bore	0.394 Inch 10 Millimeter
Outer Race Width	0.236 Inch 6 Millimeter
bore diameter:	10 mm
precision rating:	ISO Class 0
outside diameter:	22 mm
finish/coating:	Uncoated
overall width:	6 mm
bearing material:	High Carbon Chrome Steel



INA BRAINGS SALES JAPAN CO.,LTD.

bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	6 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	6 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	21000 rpm
internal clearance:	CN
fillet radius:	0.3 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	21000 RPM
dynamic load capacity:	2700 N
series:	69
static load capacity:	1270 N
manufacturer product page:	Click here