




# INA BRAINGS SALES JAPAN CO.,LTD.

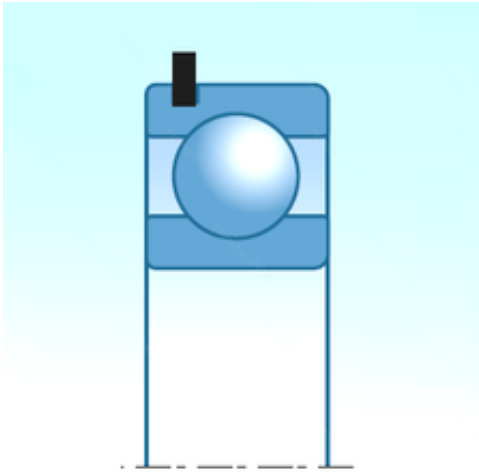

50,000 mm x 90,000 mm x 20,000 mm NTN  
6210LLBNR deep groove ball bearings

Bearing No. 6210LLBNR

6210LLBNR Bearing 2D drawings and 3D CAD models

Size	50x90x20 mm
Bore Diameter	50,000 mm
Outer Diameter	90,000 mm
Width	20,000 mm
d	50,000 mm
D	90,000 mm
B	20,000 mm
C	20,000 mm
Category	Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.48
EAN	4547359567489
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C3-Loose
Inch - Metric	Metric



## INA BRAINGS SALES JAPAN CO.,LTD.

Long Description	50MM Bore; 90MM Outside Diameter; 20MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6210LLBNR/2A
Weight / LBS	1.02
Bore	1.969 Inch   50 Millimeter
Outside Diameter	3.543 Inch   90 Millimeter
Outer Race Width	0.787 Inch   20 Millimeter
bore diameter:	50 mm
finish/coating:	Uncoated
outside diameter:	90 mm
bearing material:	High Carbon Chrome Steel
overall width:	20 mm
cage material:	Steel
bore type:	Round
inner ring width:	20 mm
closure type:	Double Sealed
outer ring width:	20 mm
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	7100 rpm
snap ring included:	With Snap Ring
fillet radius:	1.1 mm
internal clearance:	CN



## INA BRAINGS SALES JAPAN CO.,LTD.

maximum rpm:	8300 RPM
operating temperature range:	-40 to 120 ° C
standards met:	MIL-G-18709A
dynamic load capacity:	35000 N
series:	62
static load capacity:	23200 N
manufacturer product page:	<a href="#">Click here</a>
precision rating:	ISO Class 0