




# INA BRAINGS SALES JAPAN CO.,LTD.

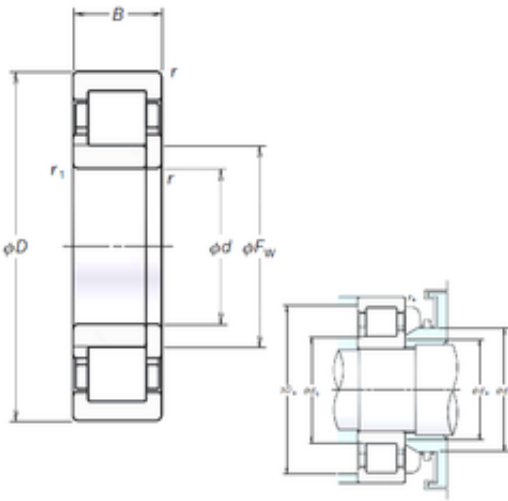

130 mm x 230 mm x 40 mm NSK NUP226EM cylindrical roller bearings

Bearing No. NUP226EM

NUP226EM Bearing 2D drawings and 3D CAD models

|                               |                 |
|-------------------------------|-----------------|
| Size                          | 130x230x40 mm   |
| Bore Diameter                 | 130 mm          |
| Outer Diameter                | 230 mm          |
| Width                         | 40 mm           |
| d                             | 130 mm          |
| Fw                            | 153,5 mm        |
| D                             | 230 mm          |
| B                             | 40 mm           |
| C                             | 40 mm           |
| r min.                        | 3 mm            |
| r1 min.                       | 3 mm            |
| da min.                       | 143 mm          |
| Da max.                       | 217 mm          |
| db max.                       | 150 mm          |
| db min                        | 143 mm          |
| ra max.                       | 2,5 mm          |
| rb max.                       | 2,5 mm          |
| S                             | 1,5 mm          |
| Db max                        | 217 mm          |
| Weight                        | 8,03 Kg         |
| Basic dynamic load rating (C) | 365 kN          |
| Basic static load rating (C0) | 455 kN          |
| (Grease) Lubrication Speed    | 2600 r/min      |
| Category                      | Roller Bearings |
| Inventory                     | 0.0             |



## INA BRAINGS SALES JAPAN CO.,LTD.

|                      |               |
|----------------------|---------------|
| Manufacturer Name    | NSK           |
| Minimum Buy Quantity | N/A           |
| Weight / Kilogram    | 7.5           |
| EAN                  | 0029176627576 |
| Product Group        | B04144        |
| hidYobi              | NUP226EM      |
| LangID               | 1             |
| D_                   | 230           |
| Macha rpm            | 5000          |
| B_                   | 40            |
| hidTable             | ecat_NSCLDR   |
| Oil rpm              | 3200          |
| rb                   | 2.5           |
| mass                 | 7.46          |
| GRS rpm              | 2600          |
| ra                   | 2.5           |
| db max               | 150           |
| TSR rpm              | 3400          |
| C0                   | 455           |
| DE_                  | 209.5         |
| Prod_Type3           | CRB_SR_NUP    |
| da                   | 143           |
| DA_                  | 28            |
| Z_                   | 17            |
| D_a max              | 217           |
| yobi                 | NUP226EM      |
| dd min               | 168           |
| C_conv               | 365000        |
| ALPHA_               | 0             |
| SDM_                 | 181.5         |
| r                    | 3             |
| dc min               | 158           |
|                      |               |



## INA BRAINGS SALES JAPAN CO.,LTD.

|      |       |
|------|-------|
| KBRG | 4165  |
| SBRG | 2     |
| r1   | 3     |
| DI_  | 153.5 |